

# AGUJEROS REDONDOS

**R** DIÁMETRO DEL AGUJERO

**T** DISTANCIA ENTRE CENTROS


COEFICIENTE DE PERFORACIÓN

**2000x1000mm**

✓ stock  
● 1/3 días

		HIERRO										GALVANIZADO						
		ESPESORES																
R	T	0,5	0,8	1	1,5	2	2,5	3	4	5	6	8	10	0,8	1	1,5	2	
0,5	1,5	●																10
0,8	2	●	●															14
1	2	●	●	●														14
1	2,2																	19
1,2	2,5			●														21
1,5	3	●		●	●													23
2	3			●		●												40
2	3,5	●	●	●	●										●			30
2	4					●												23
2,5	3,5				●	●	●											46
2,5	4			●	●													35
2,5	5					●	●											23
3	4			●	●	●	●	●										51
3	5	●	●	✓	✓	✓		●						●	●	●	●	33
3	6							●										23
3,5	4,5					●	●	●										55
3,5	5		●		●	●		●										44
4	5,5					●	●	●										48
4	6		●	●	●	●		●							●	●		40
4	7					●		●	●									30
4,5	6							●										51
5	6,5					●		●										54
5	7	●	●	✓	✓			●							●	●		46
5	8			●	●	✓		●	●	●					●	●	●	35
6	7,5					●		●										58
6	8,5		●	✓	✓											●		45
6	9			●	●													40
6	10					●		●	●	●	●						●	33
7	10			●	●			●										44

Posibilidad de fabricación a medida bajo pedido.

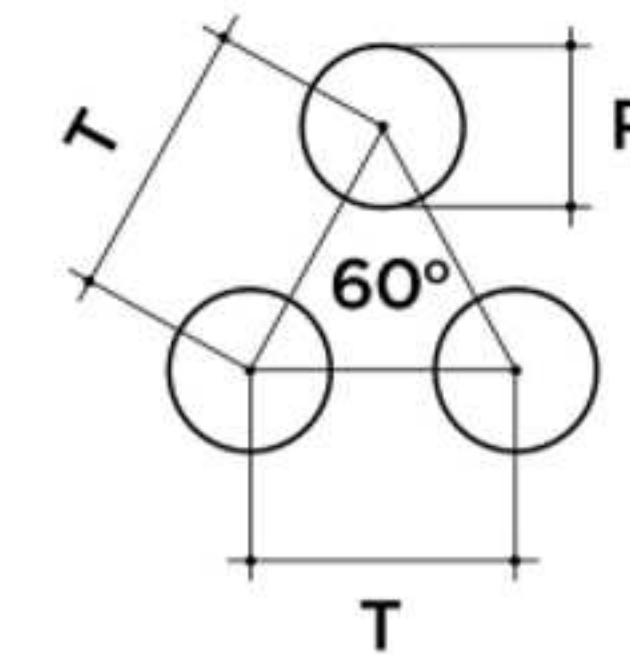

# AGUJEROS REDONDOS

**R** DIÁMETRO DEL AGUJERO

**T** DISTANCIA ENTRE CENTROS


COEFICIENTE DE PERFORACIÓN

**2000x1000mm**

✓ stock  
 ● 1/3 días

		HIERRO											GALVANIZADO					
		ESPEORES																
R	T	0,5	0,8	1	1,5	2	2,5	3	4	5	6	8	10	0,8	1	1,5	2	💡
7	11									●								37
8	11		●	✓	✓			●						●	●	●		48
8	12				●	✓		●	●	●	●					●	●	40
8	15											●						26
8	ABOC.					●											●	5
9	13				●													43
10	14		●	✓	✓	●									●	●	●	46
10	15				●	✓		●	●	●	●					●	●	40
10	18											●	●					28
12	16			●	●													51
12	17					✓		●	●	●	●							45
12	20											●	●					33
14	19				●			●			●							49
14	20											●						44
15	18			✓	✓											●		63
15	20					●		●										51
15	22					✓		●	●	●	●						●	42
15	24												●					35
15	ABOC.					●											●	23
16	20									●								58
18	22,5			●	●													58
20	25			●	✓											●		58
20	27					✓		●	●	●	●							50
20	30											●	●					40
25	34				●	●		●	●	●	●	●						49
30	37					●		●	●	●	●							60
30	40												●					51
40	50										●	●						58
70	84												●					63

Posibilidad de fabricación a medida bajo pedido.

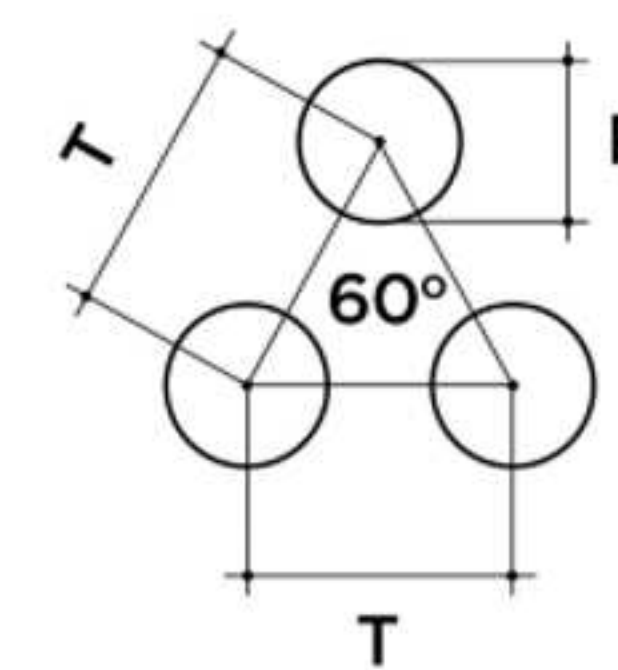

# AGUJEROS REDONDOS



DIÁMETRO DEL AGUJERO



DISTANCIA ENTRE CENTROS



COEFICIENTE DE PERFORACIÓN

## 2500x1250mm

✓ stock  
● 1/3 días

		HIERRO				GALVANIZADO			
		ESPEORES							
R	T	1	1,5	2	3	1	1,5	2	💡
3	5	●	●	●					33
5	7		●			●	●		46
5	8		●	●			●		35
6	10			●					33
8	11		●						48
8	12			●					40
10	14		●				●		46
10	15			●	●			●	40
20	27			●					50

Posibilidad de fabricación a medida bajo pedido.

## 3000x1500mm

✓ stock  
● 1/3 días

		HIERRO		GALVANIZADO		
		ESPEORES				
R	T	1,5	2	1,5	2	💡
3	5	●	●	●	●	33
4	6	●		●		40
4	7		●			30
5	7	✓		●		46
5	8		●		●	35
6	8,5	●		●		45
6	10		●		●	33
8	11	●		●		48
8	12		●		●	40
10	14	✓		●		46
10	15		●		●	40
20	27		●			50

Posibilidad de fabricación a medida bajo pedido.